

Mecmesin


testing to perfection

Torque Wrench Calibrator

- accurate
- easy-to-use
- fast operation
- economical solution
- modular system
- compact and portable
- rugged and reliable



TWC shown testing a mechanical torque wrench

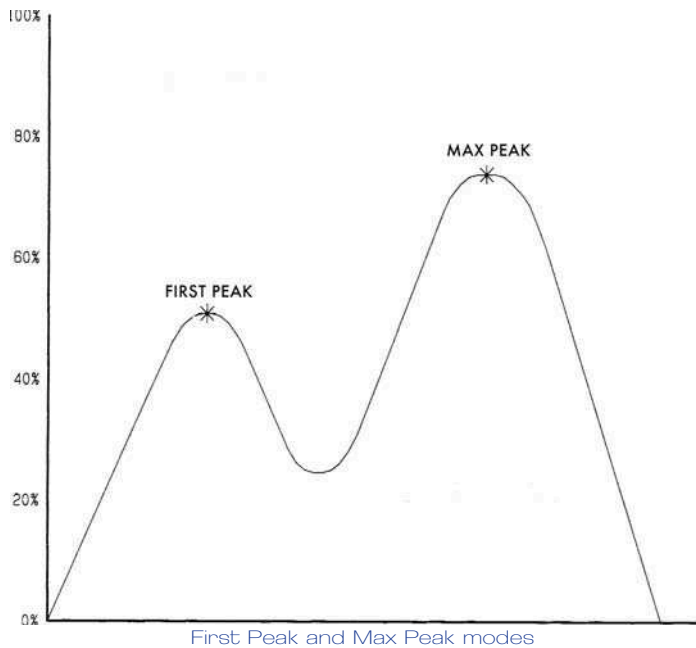

accurate
portable
easy-to-use

The Mecmesin Torque Wrench Calibrator (TWC) is a versatile, easy-to-use system, which can verify the torque applied by any type of 'click action', 'break back' or dial indicator torque wrench with ease. Based on the AFTI universal force and torque display and designed as a modular system, the TWC is the ultimate in flexibility. The standard system is supplied with its own dedicated transducer connected to the AFTI, but for added flexibility a range of different "smart" transducers are available to allow testing up to 1000N.m.


Three operating modes cover all common testing requirements. 'Normal' mode shows the live value, 'First Peak' mode records the true 'click torque' and 'Max' mode records the highest value. The TWC is easily reset using the push button torque zeroing facility.

Battery-powered, the TWC is a portable instrument ideal for use in calibration laboratories and production lines. It also has an inbuilt RS232 interface to download data to a printer or PC for further statistical analysis.

Mecmesin

testing to perfection

Dimensions mm (inch)

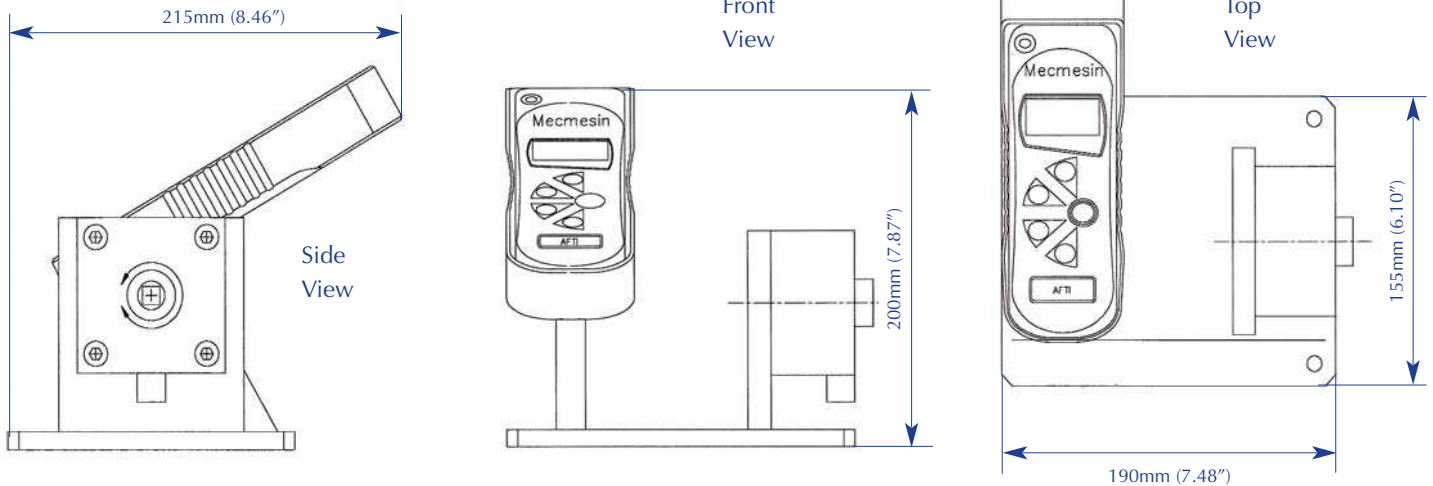

Specifications

Model	Rated Torque Range (F.S/D)	Resolution					
		N-m	kg-m	kg-cm	lb-ft	lb-in	SQ. drive
TWC 1	15N-m/11lb-ft	15 x 0.003	1.5 x 0.0003	150 x 0.03	11 x 0.003	130 x 0.03	3/8"
TWC 2	60N-m/44lb-ft	60 x 0.02	6 x 0.002	600 x 0.2	44 x 0.009	520 x 0.2	3/8"
TWC 3	100N-m/72lb-ft	100 x 0.02	10 x 0.002	1000 x 0.2	72 x 0.02	870 x 0.2	1/2"
TWC 4	150N-m/110lb-ft	150 x 0.03	15 x 0.003	1500 x 0.3	110 x 0.03	1300 x 0.3	1/2"
TWC 5	600N-m/440lb-ft	600 x 0.2	60 x 0.02	6000 x 2.0	440 x 0.09	-	3/4"
TWC 6	1000N-m/720lb-ft	1000 x 0.2	100 x 0.02	10000 x 2.0	720 x 0.2	-	1"
TWC 7	1500N-m/1080lb-ft	1500 x 0.3	150 x 0.03	15000 x 3	1080 x 0.3	-	1"

Standard Accuracy: $\pm 0.5\%$ of full scale

AFTI Specifications

Operating Temperature: 0 - 50°C

Calibration Temperature: 20°C \pm 2°C

Output:

RS232-C: 8 data bits, 1 Start bit, 1 Stop bit, no parity

Digimatic

Analogue

Mecmesin reserves the right to alter equipment specifications without prior notice.



ISO 9001

CERTIFICATE NUMBER FS 58553

S.I. Instruments
256 South Rd. Hilton
South Australia 5033
Ph (08) 8352 5511

info@si-instruments.com
www.si-instruments.com

DISTRIBUTOR STAMP

Head Office
Mecmesin Limited
Newton House, Spring
Copse Business Park,
Slinfold, West Sussex,
RH13 0SZ, UK

e. sales@mecmesin.com
t. +44 (0) 1403 799979
f. +44 (0) 1403 799975

North America
Mecmesin Corporation
45921 Maries Road,
Suite 120, Sterling
Virginia 20166,
U.S.A.

e. info@mecmesincorp.com
t. +1 703 433 9247
f. +1 703 444 9860

Asia
Mecmesin Asia Co. Ltd
9/1 Chaiyo Building, 11th Floor,
Room 1106, Rama 9 Road, Huaykwang,
Bangkok, 10310,
Thailand

e. sales@mecmesinasia.com
t. +66 2 247 46 81
f. +66 2 247 46 82

China
Mecmesin (Shanghai) Pte Ltd
Unit 18D, SiChuang Building No3,
No 600, Tian Shan Road,
Changning District, Shanghai,
People's Republic of China

e. sales@mecmesin-china.com
t. +86 21 6233 3459
f. +86 21 6233 3479